CTMP 腾龙·泵阀

CHINA · TENGLONG MAGNETIC PUMP

FLUOROPLASTIC SELF-PRIMING PUMP

FZB Fluoroplastics self-priming centrifugal pump

Use


Transportation of various acid-base and organic solutions, Water absorption in a pool, Conveyance of raw materials.



Design features


In accordance with international standards, the interior is fluoroplastics and metal materials, customizable flushing schemes.

Part drawing

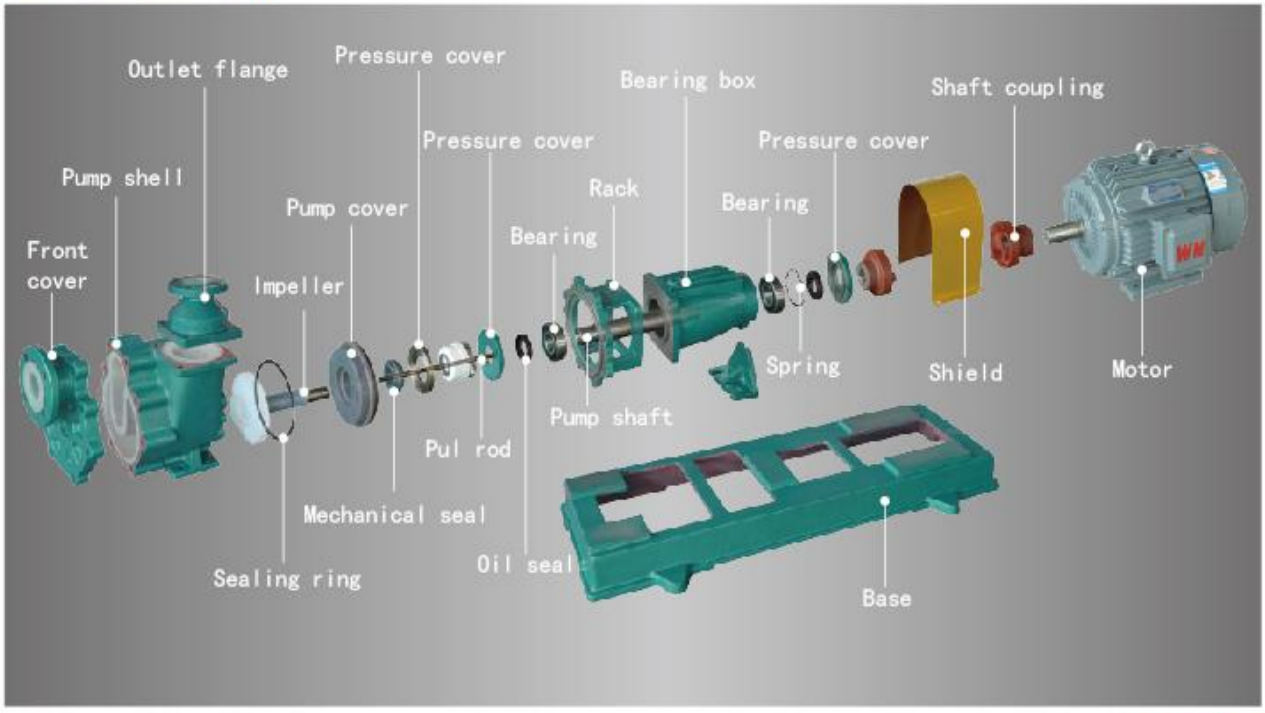


Structure and materials

FZB Series

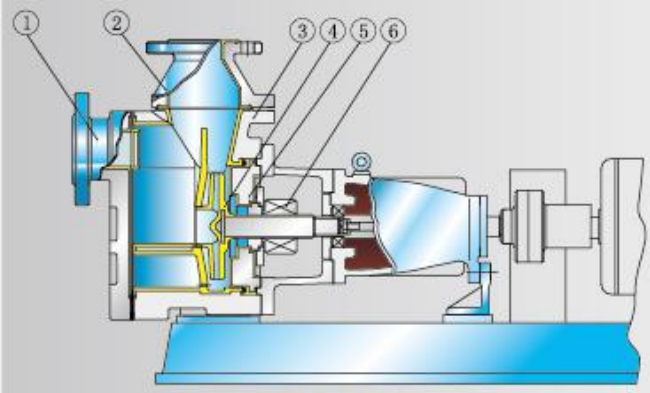

1	Pump cover	HT200-F46
2	Outlet flange	HT200-F46
3	Pump shell	HT200-F46
4	Impeller	Fluoroplastic alloy
5	Pump cover	HT200-F46
6	Mechanical seal	WB2

Model meaning

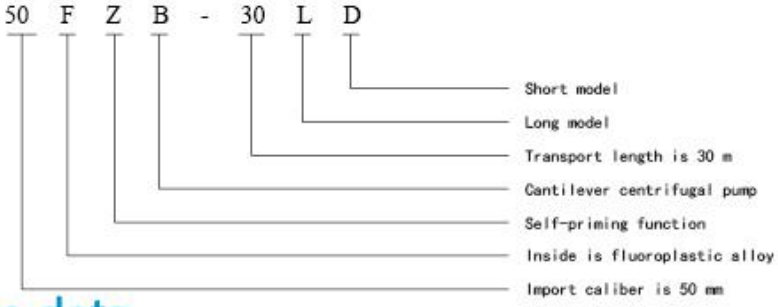

Performance data

NO.	Type	Flow	Head	EFF	NPSH	Aperture	Self-priming height	Self-priming time	Speed	Power	Weight
NO.	Type	FLOW m^3/h	HEAD m	EFF %	NPSH m	Import×export mm	HEIGHT m	TIME s	SPEED r/min	POWER kw	WEIGHT kg
1	25FZB-18L	3.6	18	20	3.0	25×25	1.0	<180	2900	2.2	65
2	32FZB-18L	6.3	18	20	3.0	32×25	1.0	<180	2900	2.2	65
3	40FZB-20D	8	20	42	3.0	40×50	3.0	<180	2900	3	47
4	40FZB-30L	8	30	48	3.5	40×50	3.0	<150	2900	4	160
5	50FZB-20D	12	20	42	3.0	50×50	3.0	<180	2900	3	47
6	50FZB-30L	12	30	48	3.5	50×50	3.0	<150	2900	4	160
7	50FZB-45L	12	45	35	3.5	50×32	3.0	<150	2900	7.5	210
8	65FZB-30L	25	30	55	4.0	65×50	3.0	<200	2900	7.5	210
9	65FZB-45L	25	45	42	4.0	65×40	3.0	<180	2900	11	300
10	80FZB-30L	50	30	58	4.5	80×65	3.0	<150	2900	11	284
11	80FZB-45L	50	45	53	4.5	80×65	3.0	<180	2900	15	330
12	100FZB-30L	100	30	60	6.0	100×80	3.0	<250	2900	18.5	300