CTMP 腾龙·泵阀

CHINA · TENGLONG MAGNETIC PUMP

STAINLESS STEEL MAGNETIC PUMP

CQB-P Stainless steel magnetic pump



survey

Pump material : Stainless steel

(304、316、316L)

Flow : 3.6~100m^3/h

Head : 20~80m

Power : 1.1~55kW

Service temperature : -20~100℃


Design features

Internal stainless steel, transport organic acid, organic compounds, acid, alkali and corrosive substances, friction parts using silicon carbide, increased service life.

Model meaning

CQB 80 - 65 - 160 P

CQB	Magnetic pump
80	Inlet diameter is 80 mm
65	Outlet diameter is 65 mm
160	Impeller diameter is 160 mm
P	Stainless steel material

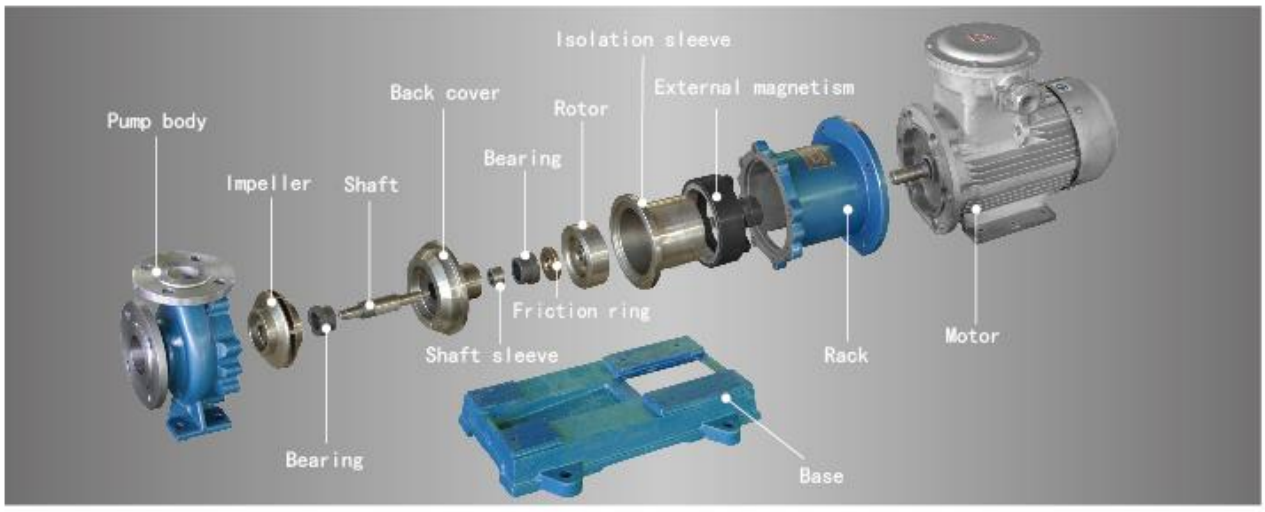

Performance data

CQB—P Series

NO.	Type	Flow	Head	Inlet	Outlet	Power	Speed	Material
NO.	Type	FLOW m^3/h	HEAD m	NILET mm	OUTLET mm	POWER kw	SPEED r/min	MATERIAL
1	CQB32-20-125P	3.2	20	32	20	1.1	2900	
2	CQB32-20-160P	3.2	32	32	20	1.5	2900	
3	CQB40-25-110P	6	13	40	25	1.1	2900	
4	CQB40-25-125P	6	20	40	25	2.2	2900	
5	CQB40-25-160P	6	32	40	25	3	2900	
6	CQB40-25-200P	6	50	40	25	5.5	2900	
7	CQB50-32-125P	12.5	20	50	32	3	2900	
8	CQB50-32-160P	12.5	32	50	32	4	2900	304 316 316L
9	CQB50-32-200P	12.5	50	50	32	7.5	2900	
10	CQB50-32-250P	12.5	80	50	32	15	2900	
11	CQB65-50-125P	25	20	65	50	4	2900	
12	CQB65-50-160P	25	32	65	50	7.5	2900	
13	CQB65-40-200P	25	50	65	40	15	2900	
14	CQB65-40-250P	25	80	65	40	18.5	2900	
15	CQB80-65-125P	50	20	80	65	7.5	2900	
16	CQB80-65-160P	50	32	80	65	15	2900	
17	CQB80-50-200P	50	50	80	50	18.5	2900	
18	CQB80-50-250P	50	80	80	50	37	2900	
19	CQB100-80-125P	100	20	100	80	15	2900	
20	CQB100-80-160P	100	32	100	80	18.5	2900	
21	CQB100-65-200P	100	50	100	65	37	2900	
22	CQB100-65-250P	100	80	100	65	55	2900	



CQB-G high temperature jacket type



The rotor assembly