CTMP 腾龙·泵阀

CHINA · TENGLONG MAGNETIC PUMP

FLUORINE PLASTIC PUMP

IHF-D Fluoroplastic centrifugal pump

Use


For acid washing, paint spraying, electrolyte delivery, wastewater treatment, and acid treatment



Design features


In accordance with international standards, internal fluoroplastics, and metal materials, easy to install, easy to maintain

Part drawing

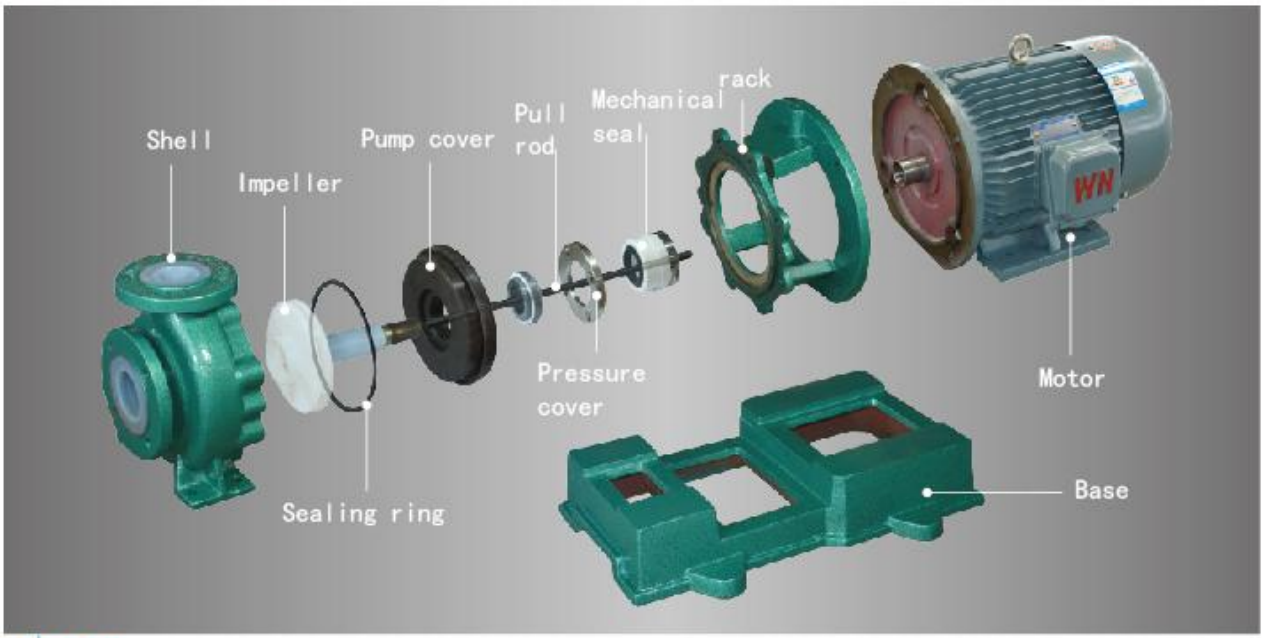

Structure and materials

IHF—D Series

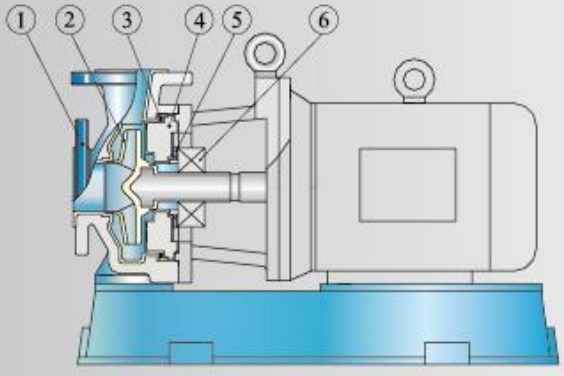

1	Pump shell	HT200 and F46
2	Impeller	Fluoroplastic alloy
3	Sealing ring	Fluorine rubber
4	Pump cover	HT200 and F46
5	Pressure cover	304
6	Mechanical seal	WB2

Model meaning

IH F 65 - 50 - 125 (D)

- Short support
- Impeller diameter is 125mm
- Outlet diameter is 50mm
- inlet diameter is 65mm
- Fluoroplastic alloy
- Fluoroplastic alloy

Performance data

NO.	Type	Flow	Head	EFF	NPSH	Aperture	Speed	Power	Weight
NO.	Type	FLOW m^3/h	HEAD m	EFF %	NPSH m	Import×export mm	SPEED r/min	POWER kw	WEIGHT kg
1	IHF50-32-125 (D)	7 * 12.5 15	22 20 16	50 52 55	3.2	50×32	2900	3	85
2	IHF50-32-160 (D)	7 * 12.5 15	33 32 30	35 47 47	3.2	50×32	2900	4	95
3	IHF50-32-200 (D)	7 * 12.5 15	51 50 49	28 40 48	3.2	50×32	2900	7.5	135
4	IHF65-50-125 (D)	15 * 25 35	22 20 16	46 61 67	3.5	65×50	2900	3	90
5	IHF65-50-160 (D)	15 * 25 35	33 32 30	45 56 65	3.5	65×50	2900	5.5	125
6	IHF80-65-125 (D)	35 * 50 60	22 20 18	52 65 70	4	80×65	2900	5.5	125
7	IHF80-65-160 (D)	35 * 50 60	33 32 30	52 65 70	4	80×65	2900	7.5	125
8	IHF100-80-125 (D)	65 * 100 120	22 20 18	65 70 65	5	100×80	2900	11	160