CTMP 腾龙·泵阀

CHINA · TENGLONG MAGNETIC PUMP

FLUORIOPLASTIC PUMP

FSB-L Fluorine alloy centrifugal pump

Use


Transportation of chlor-alkali, chlorobenzene, pickling, pesticide, medicine, corrosive substances



Design features


Whole plastic pump body. Cantilever structure, no load bearing, but light and easy to maintain.

Part drawing

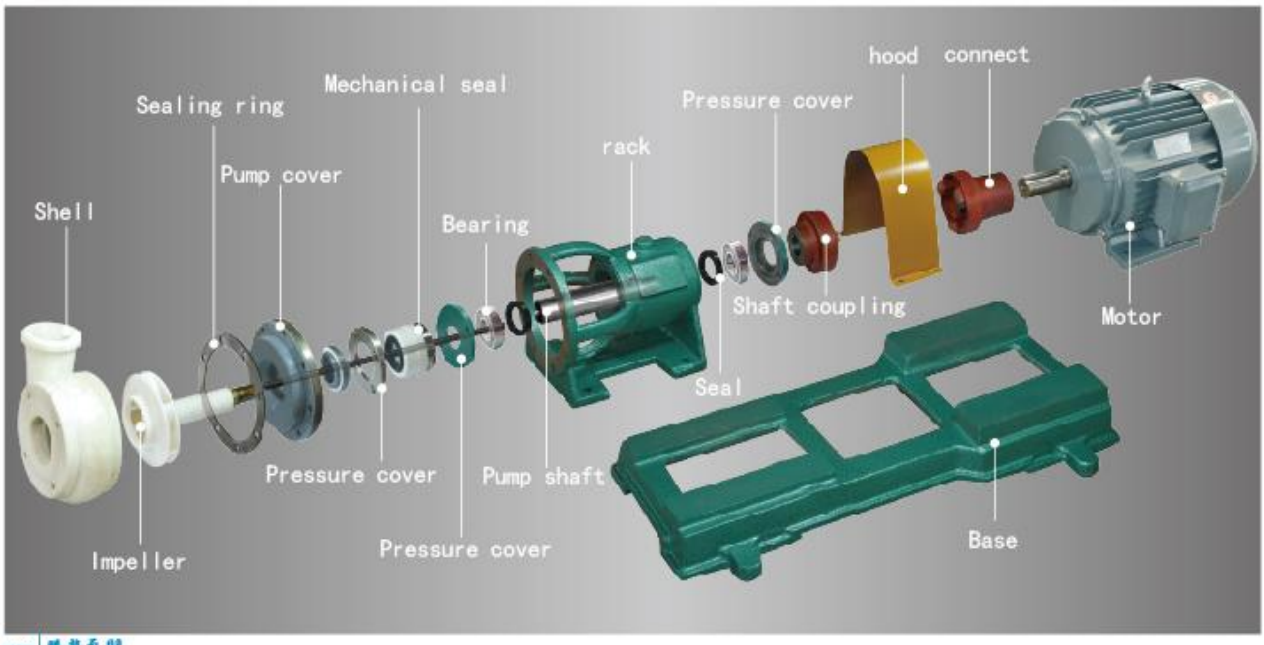


FSB Series

Structure and materials

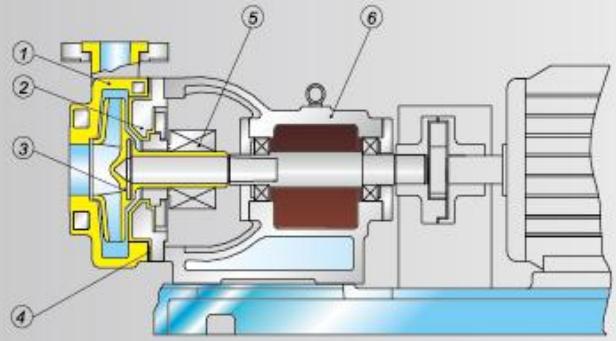

1	Pump shell	Fluoroplastic alloy
2	Pump cover	HT200 and F46
3	Impeller	Fluoroplastic alloy
4	Sealing ring	Fluorine rubber
5	Mechanical seal	WB2
6	Rack	HT200

Model meaning

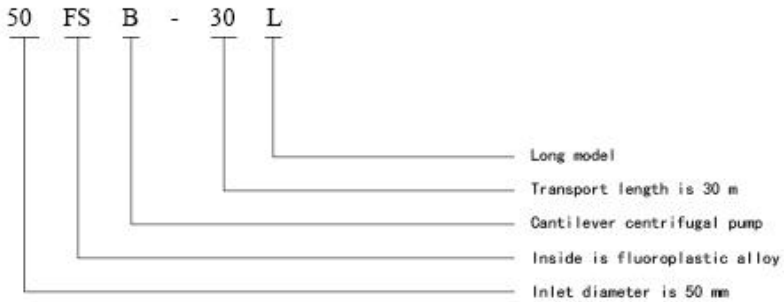

Performance data

NO.	Type	Flow	Head	EFF	NPSH	Aperture	Speed	Power	Weight
NO.	Type	FLOW m^3/h	HEAD m	EFF %	NPSH m	Import×export mm	SPEED r/min	POWER kw	WEIGHT kg
1	25FSB-25L	3.6	25	30	3.0	25×25	2900	1.5	48
2	40FSB-15L	5	15	45	3.0	40×32	2900	3	75
3	40FSB-20L	10	20	42	3.0	40×32	2900	3	75
4	40FSB-30L	10	30	36	3.0	40×32	2900	3	75
5	50FSB-20L	12.5	20	52	3.0	50×32	2900	3	75
6	50FSB-25L	12.5	25	48	3.0	50×32	2900	3	75
7	50FSB-30L	12.5	30	46	5.0	50×32	2900	3	75
8	65FSB-32L	25	32	56	3.5	65×50	2900	5.5	125
9	80FSB-20L	50	20	65	3.5	80×65	2900	5.5	125
10	80FSB-25L	50	25	64	3.5	80×65	2900	7.5	130
11	80FSB-30L	50	30	64	3.5	80×65	2900	7.5	130
12	80FSB-40L	45	40	63	3.5	80×65	2900	11	210
13	80FSB-50L	50	50	63	3.5	80×65	2900	15	208
15	100FSB-32L	100	32	70	3.5	100×80	2900	15	250