CTMP 腾龙·泵阀

CHINA · TENGLONG MAGNETIC PUMP

FLUOROPLASTIC PUMP

GDF Fluoroplastic pipe pump

Use


Transportation of chlor-alkali, chlorobenzene, pickling, pesticides, pharmaceuticals,corrosive substances.

Design features

According to international standards, the interior is fluoroplastics and metal materials, small area, transport horizontal line.




Part drawing

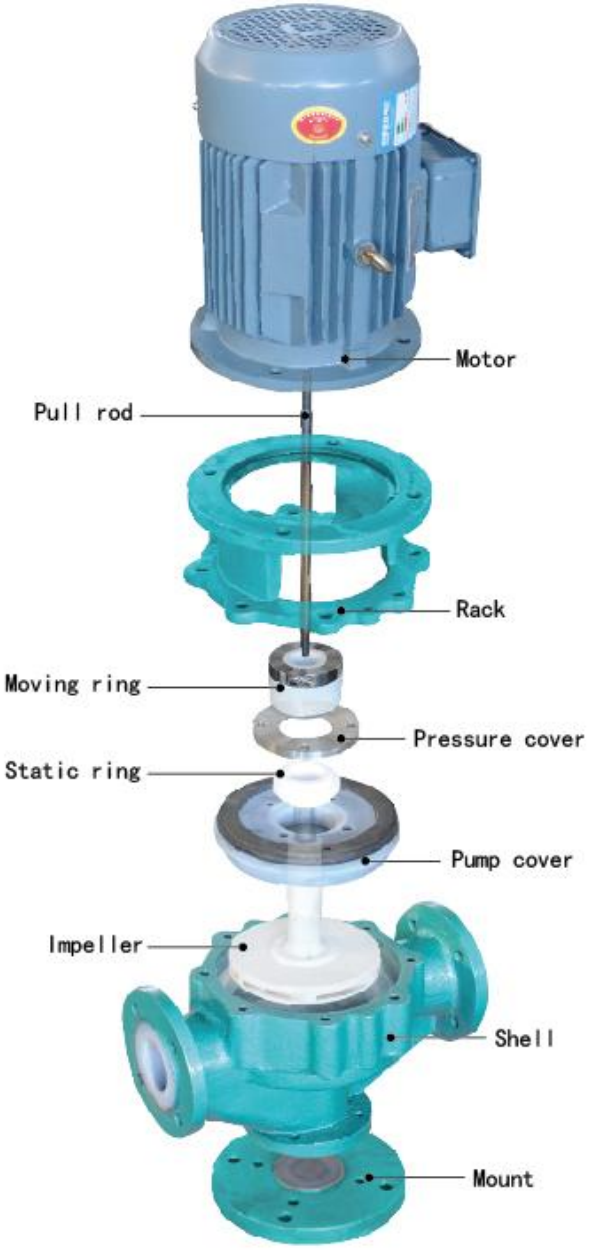


GDF Series

Structure and materials

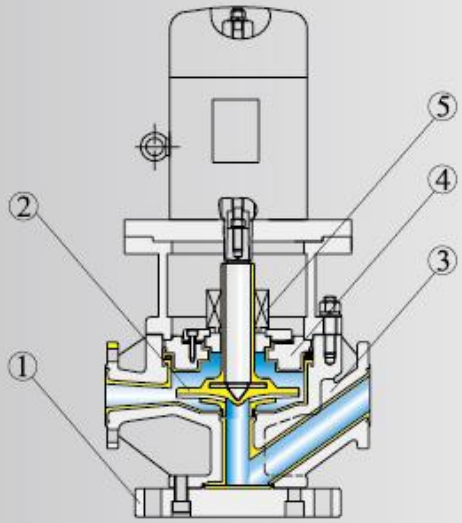

1	Mount	45#Steel and F46
2	Impeller	Fluoroplastic alloy
3	Pump shell	HT200 and F46
4	Pump cover	TH200 and F46
5	Mechanical seal	WB2

Model meaning

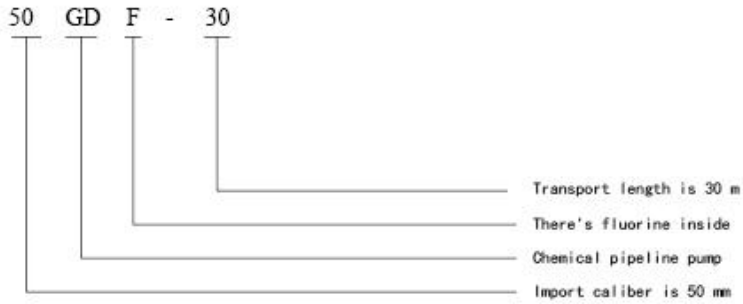

性能参数

NO.	Type	Flow	Head	EFF	NPSH	Aperture	Speed	Power	Weight
NO.	Type	FLOW m^3/h	HEAD m	EFF %	NPSH m	Import× Import mm	SPEED r/min	POWER kw	WEIGHT kg
1	32GDF-20	3.6	20	30	3.0	32×32	2900	1.5	60
2	32GDF-32	3.6	32	45	3.0	32×32	2900	2.2	75
3	40GDF-20	6	20	42	3.0	40×40	2900	1.5	75
4	40GDF-32	6	32	36	3.0	40×40	2900	3	90
5	50GDF-20	12.5	20	52	3.0	50×50	2900	2.2	75
6	50GDF-32	12.5	32	48	3.0	50×50	2900	4	90
7	65GDF-20	25	20	46	5.0	65×65	2900	4	95
8	65GDF-32	25	32	56	3.5	65×65	2900	5.5	125
9	80GDF-20	50	20	65	3.5	80×80	2900	5.5	140
10	80GDF-32	50	32	64	3.5	80×80	2900	7.5	150
11	100GDF-20	100	20	59	4.0	100×100	2900	11	210
12	100GDF-32	100	32	59	4.0	100×100	2900	15	280